

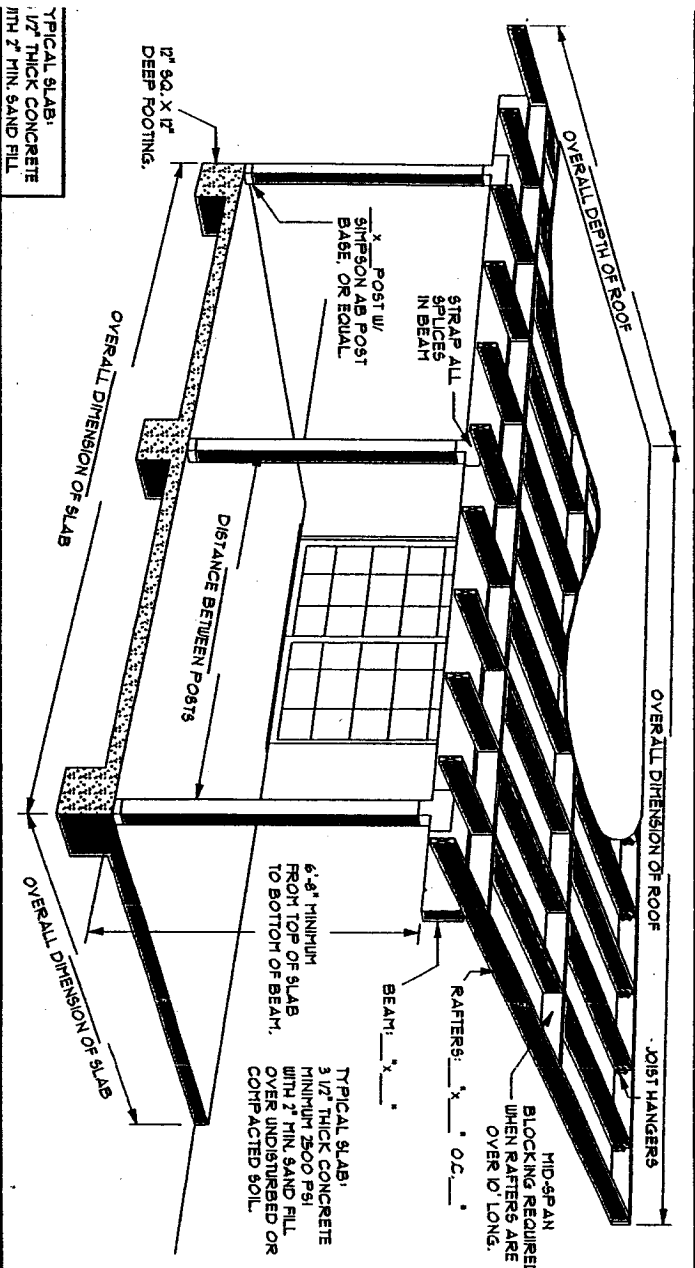
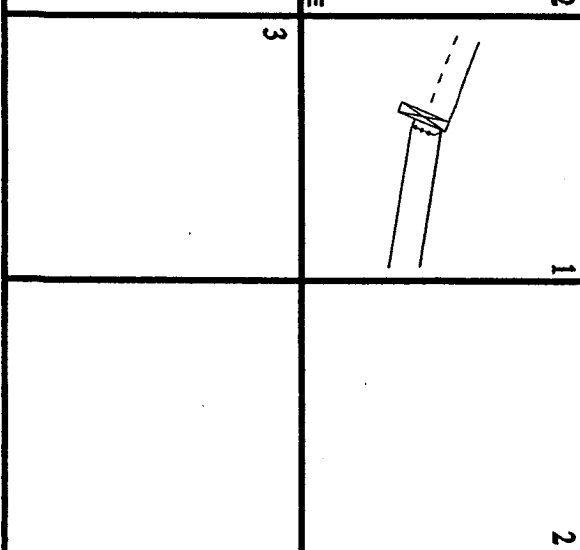


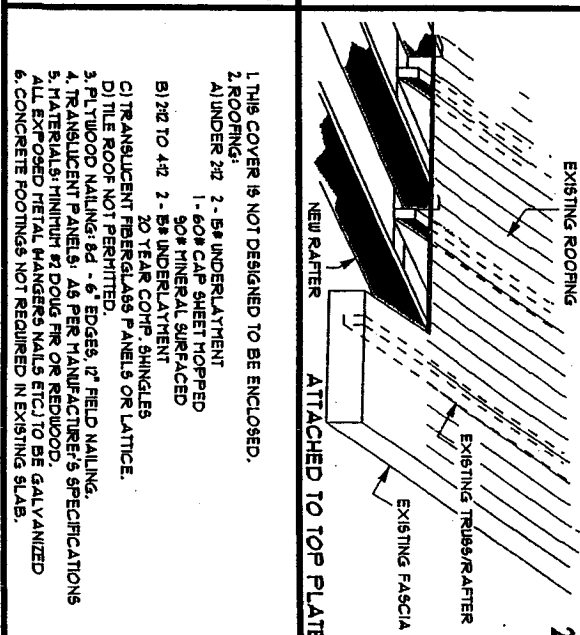


TYPICAL SLAB: 3 1/2" THICK CONCRETE WITH 2" MIN. SAND FILL

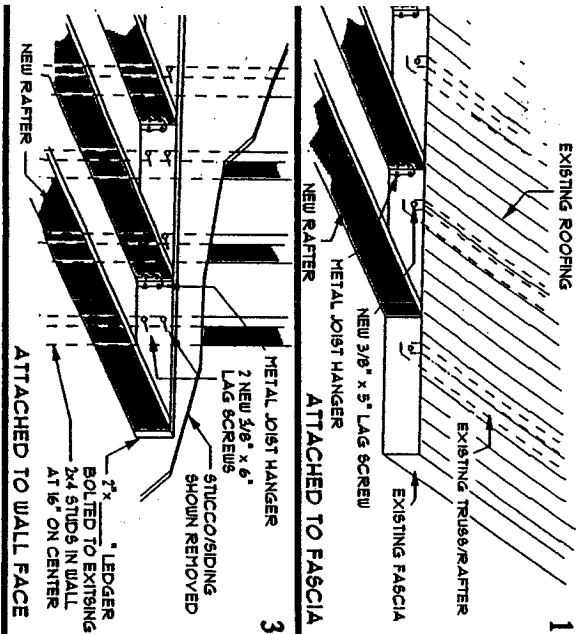

BEAM SPAN TABLE	
DISTANCE BETWEEN POST CENTERS	MINIMUM BEAM DIMENSIONS
4'	4"x4"
6'	4"x6"
8'	4"x8"
10'	4"x10"
12'	4"x12"

RAFTER SPAN TABLE	LUMBER SIZE	SPACING	LOW SLOPE	
			MAX. SPAN DOUG. FIR #1	MAX. SPAN DOUG. FIR #2
2" x 6"	16"	12"	11'-0"	10'-0"
2" x 6"	16"	12"	10'-0"	9'-0"
2" x 6"	16"	12"	9'-0"	8'-0"
2" x 6"	16"	12"	8'-0"	7'-0"
2" x 6"	16"	12"	7'-0"	6'-0"
2" x 6"	16"	12"	6'-0"	5'-0"
2" x 6"	16"	12"	5'-0"	4'-0"
2" x 6"	16"	12"	4'-0"	3'-0"
2" x 6"	16"	12"	3'-0"	2'-0"
2" x 6"	16"	12"	2'-0"	1'-0"
2" x 6"	16"	12"	1'-0"	0'-0"

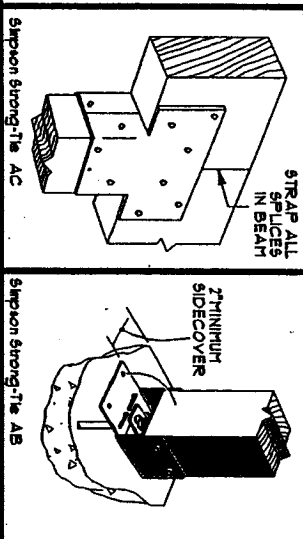

NAME _____

ADDRESS _____

CROSS STREET _____

A.P.N. _____ PHONE _____

Scale _____

Job _____

Sheet _____

or _____

THE CITY OF
HANFORD